



1.

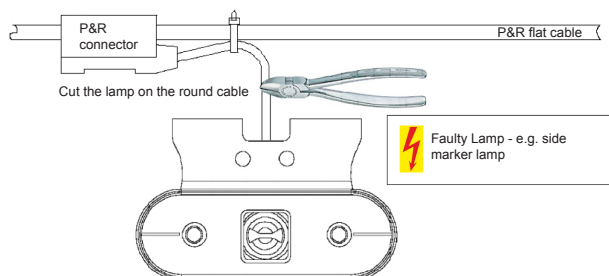


If it is necessary to change a consumer, the P&R connector has to stay on the P&R flat cable! It is not allowed to remove it.

2.

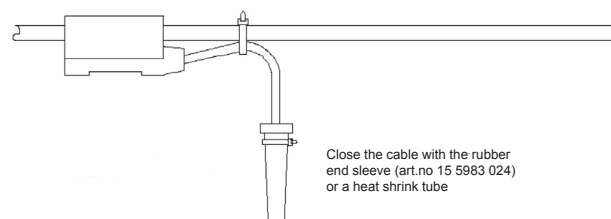


The „old“ cable has to be closed waterproofed with the rubber end sleeve (art.no. 15 5983 024).

3.

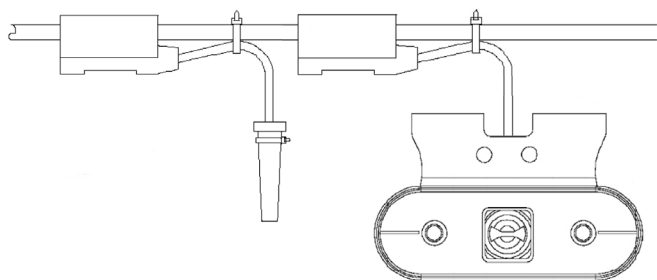

In case of exchange of the lamp click the new lamp beside the „old“ one. Use only the original Aspöck P&R pliers!

4.

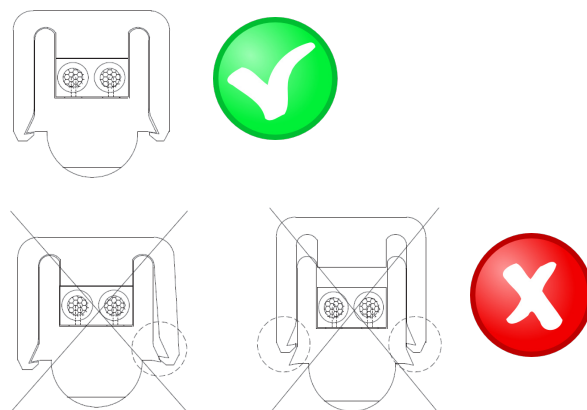


Spare parts & equipment P&R:

- P&R pliers Art.No. 10 W100 517
- P&R Repair sleeve Art.No. 15 5625 394
- P&R Rubber end sleeve Art.No. 15 5729 014
- P&R Connection cable Art.No. 68 5000 007
- P&R Sealing cap Art.No. 15 5971 007
- P&R Flat cable 32m Art.No. 17 7225 024
- P&R Flat cable 200m Art.No. 17 7225 127



Tolerance for a correct locking:
Measure at closed pliers!

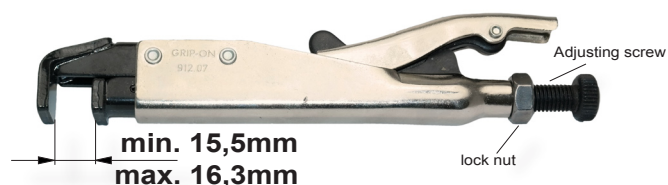

ATTENTION: Please check this value once a week!

!! ATTENTION !!

Please use only the original Aspöck P&R pliers (art.no. 10 W100 517) to press the connector on the Aspöck P&R flat cable. Warranty will be void for non-compliance!

www.baeder-automotive.com