

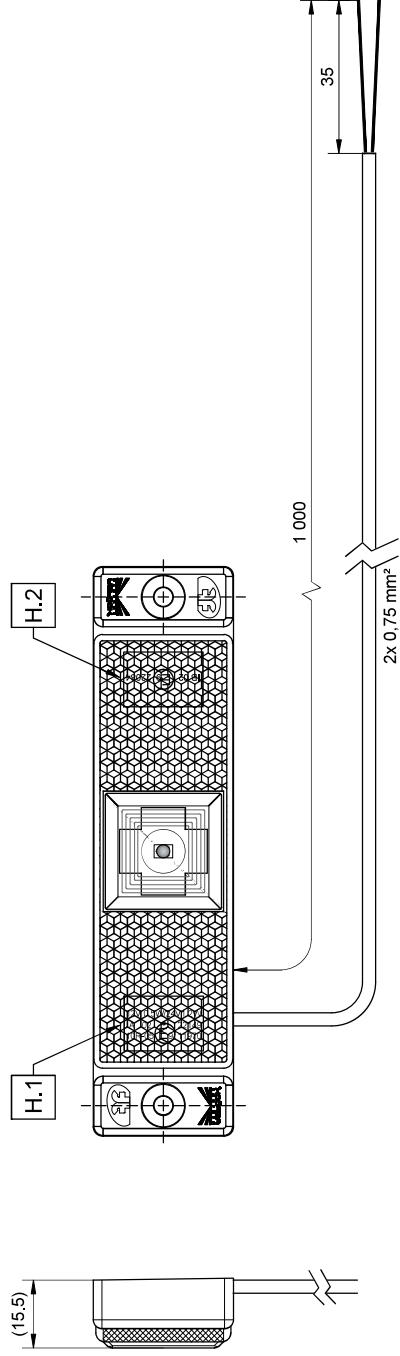




Level	Zone	ECI N°.	Revision note	Date	Designed	Checked

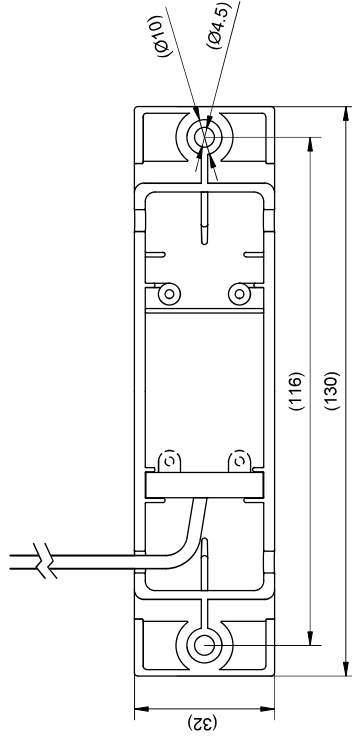

positions lamp		
function	pin	wire colour
Masse	1	weiss <i>white</i>
GND		
+VDC	2	braun <i>brown</i>
+VDC		



Electrical Specification				
Funktion <i>Function</i>	Nennspannung <i>Nominal Voltage</i>	Spannungsbereich <i>Voltage Range</i>	Nennstrom <i>Nominal Current</i>	Nennleistung <i>Nominal Power</i>
Volt (V)	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Front Position	12V / 24V	10V - 30V	0,07A / 0,07A	0,8W / 1,8W

	CP_03_Q_Bemaßungsrichtlinie Test dimension (SPC) Unfinished dimension DIN 406-10	() Auxiliary dimension DIN 406-10 Unfinished dimension DIN 406-10	Surface quality ISO 1302	Theoretical dimension ISO 1101	
Designed by		Checked by		Approved by	
Hager Comella		2023/07/26	Stubretter Daniel	2023/08/07	Weberbauer Daniel
		Designation			
		UnIFAB white with refl. 1,0m DC			
		Drawing Nr. 42347461		Tolerance CP_04-2_Toleranzen	
		Business Unit SALES - 36		Verklebungsprodukte	
Dimensions in mm 		Weight		Scale	not in scale
Part number		Level		R01	Sheet 1 / 1

Homologation description				
H.1	E9 22149	A 02		
H.1	E9 11970	10R 05		
H.2	E9 22084	1B 02		