



VBG PART NO	LENGTH	VERSION	QUANTITY	BOLT KIT 21-175000
21-210600	2400	With Outline marker (red)	1 pc	included
21-211000	"	"	12-pack	not included
21-210700	2400	With Outline marker (red) and Reflector kit	1 pc	included
21-211100	"	"	12-pack	not included
21-210800	2400	With Outline marker (red) and VBG decal	1 pc	included
21-211200	"	"	12-pack	not included
21-595000	2400	With Outline marker (red) and two transparent VBG decals	1 pc	included
21-594500	"	"	12-pack	not included
21-210900	1900	With Outline marker (red) and VBG decal	1 pc	included
21-211300	"	"	12-pack	not included

Bolt kit
21-175000

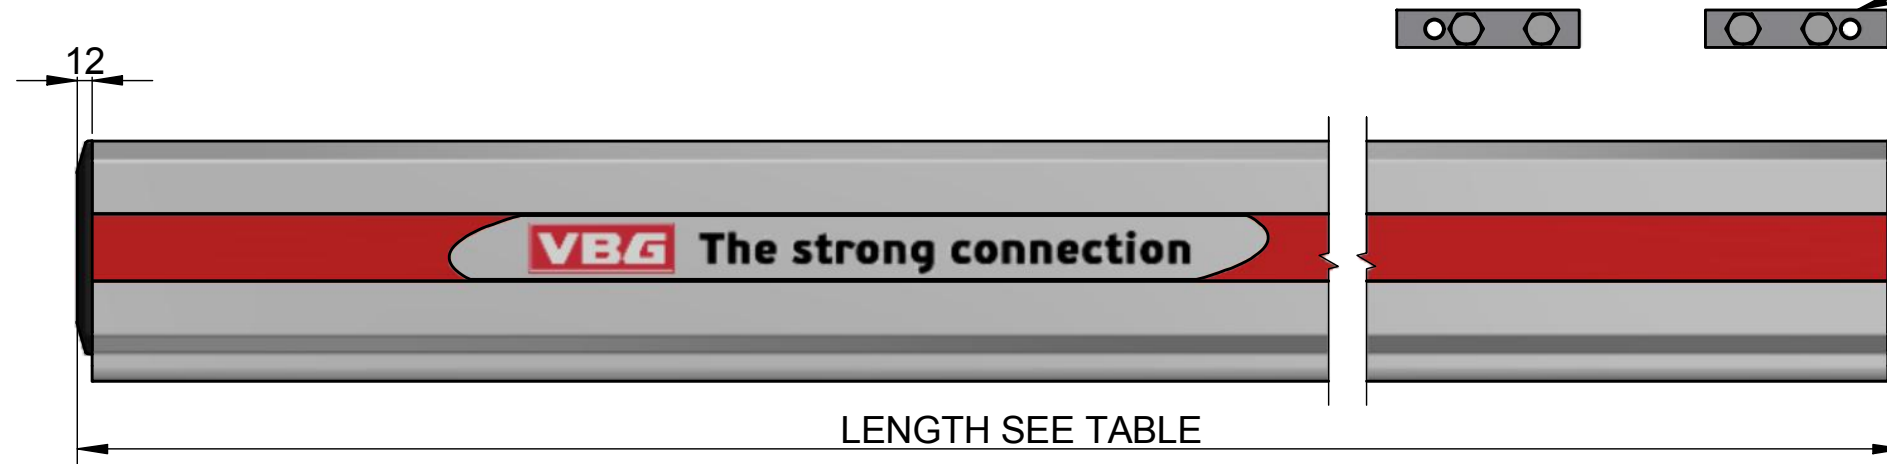

LENGTH SEE TABLE

MIN. SUPPORT AREA
MIN 760 - MAX 1300

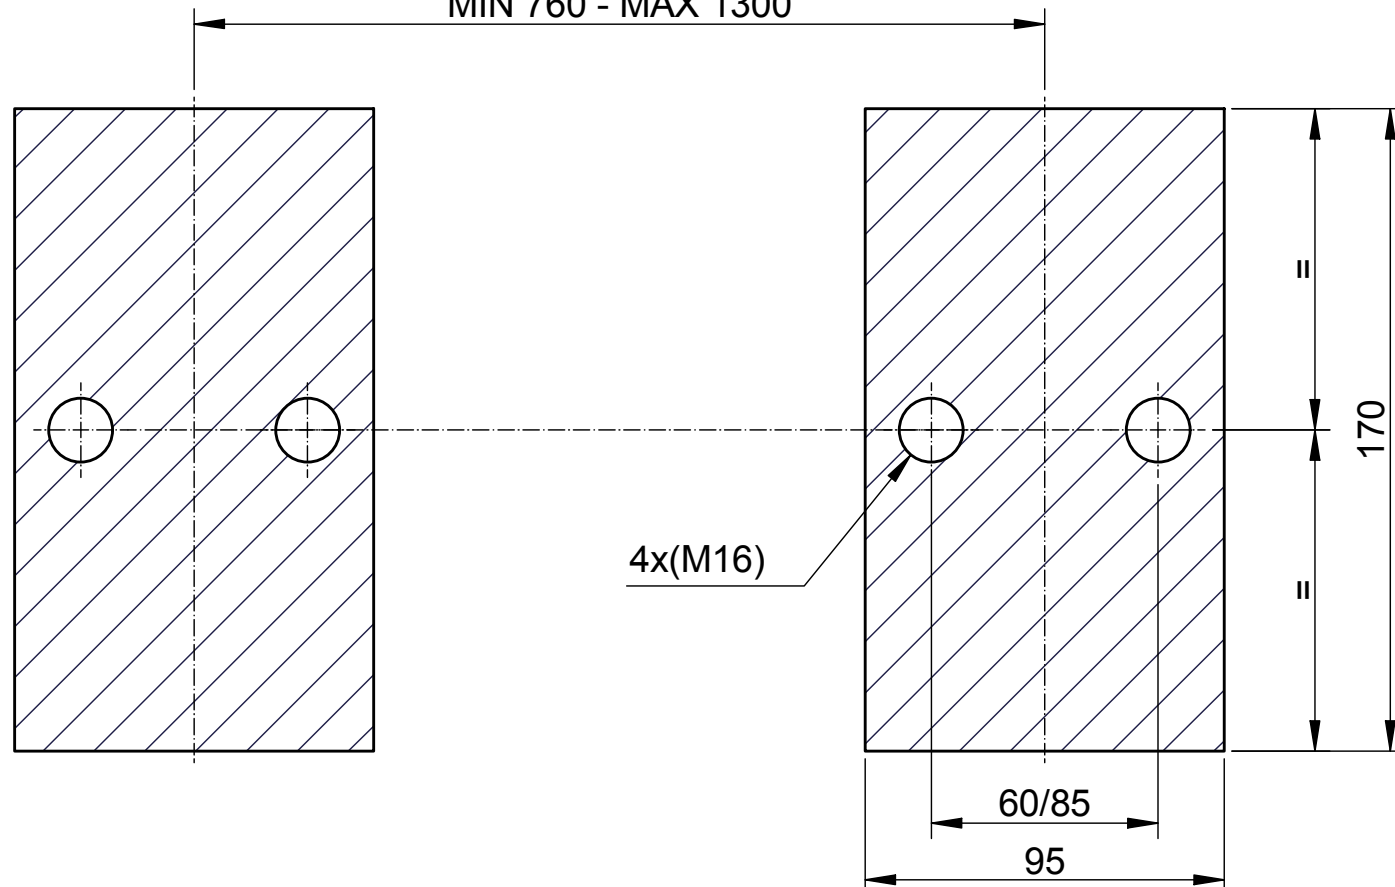

2 Steel spacer allowed between UHAP-2 and VBG connection brackets. Min support area shall be fulfilled. Max thickness 20mm. Mounting screw length must be considered.

1 PROTECTION BEAM OF UHAP DESIGN
TYPE APPROVAL NO: s
e11*70/221*2006/20*5001
E11 58R-02 5001



VBG GROUP

Description
Al Protection beam assy with VBG Decal

Modified Date	Modified by	Modification No.	Issue
2019-04-29	PR	13110	a
3D Model No.	21-210800		Engineer
Sheet Size	Scale	Projection	Drafting Date
A3	1:6	1st	2012-06-27
Stage	Drawing No.		Drafted by
P	21-210800 (F) INFO		JB

This drawing is the property of VBG Group AB and is protected in accordance with prevailing law. Changes must be made in CAD-program, this concerns both 2D & 3D.