

Vision is
our mission®

Adapter cable 0,2 monitor r4F RA M4F


Article no. 0308410

2016 • DS0308410 R1-0

Product Data



Dimensions

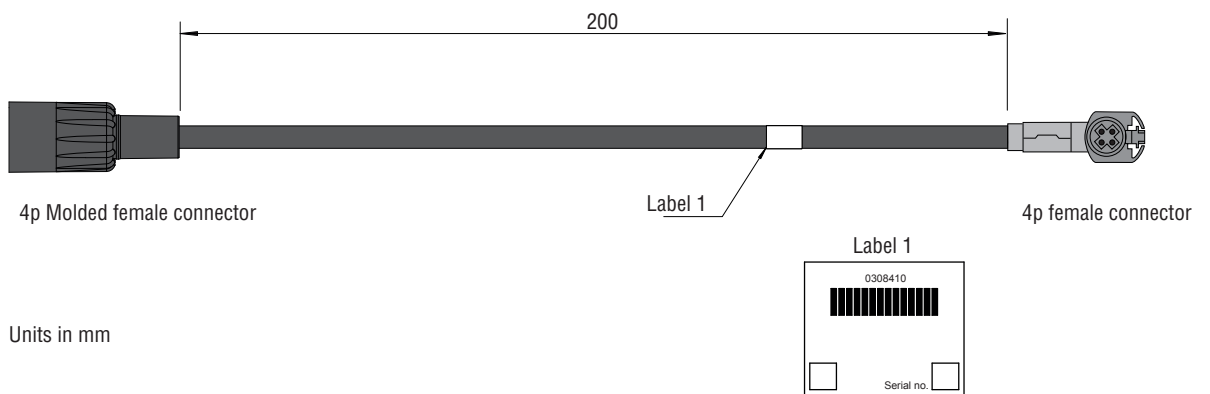


TECHNICAL DATA

Adapter cable 0,2 monitor r4F RA m4F


Description	0308410
Article number	200mm.
Cable length	-40°C...+85°C
Operating temperature	4 pins molded female connector + 4 pins Rosenberger molded female connector Z-Coded.
Connectors	4 x tinned stranded copper wires Cu ETP1, PVC sheath.
Cable	90 +/-15 Ohm.
Characteristic impedance	Single: min. 20mm, multiple (<10x): min 50mm.
Bending radius	

Cable connections



Female 4p molded
connector
Front View

3 = Black = 24V/DC
1 = Green = Video
4 = Red = 0V
2 = Blue = Video shield
Shielding connected to housing



Rosenberger
Female connector
Z-Coded
Front View

1 = Black = 24V/DC
2 = Green = Video
3 = Red = 0V
4 = Blue = Video shield
Shielding connected to housing

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

